
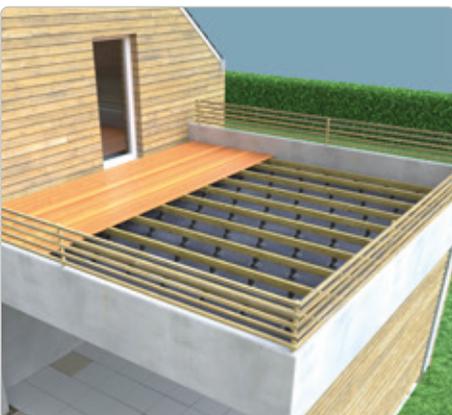
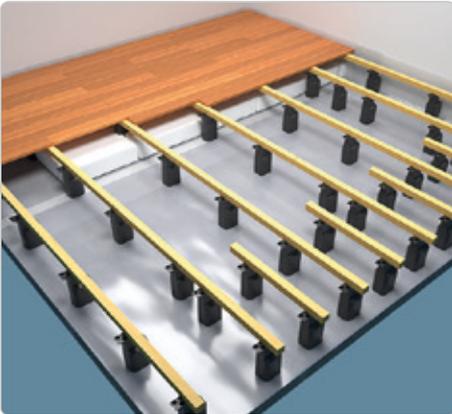


Knudsen Kilen

Combi Max System - adjustable pedestals

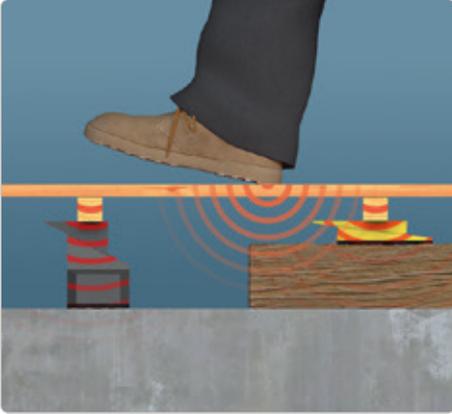

Combi Max

Secure, flexible and adjustable pedestals for elevated floors

- EPD verified
- Tested for pressure load
- Doesn't split by drilling with nails or screws
- Not affected by damp, rot, or dry rot
- Documented lifespan of min. 75 years
- No toxic smoke in case of fire
- Sharp, staggered saw teeth grant secure a precise and non-skid elevation – also sideways

Combi Max is the most used system for blocking up elevated floors and wooden terraces, securing a solid foundation while handling a massive load.

The Combi Max Top together with Combi Max Low / High form the basis of Combi Max (50-138 mm). All combinations of Top and Combi Max Low / High can be heightened by 1-5 Combi Extensions that each raises the elevation with 35 mm. It grants a blocking-up span of 50-313 mm.

There are two types of soles in the Combi Max series:

- **Combi Sole** protects vulnerable surfaces, e.g. roofing felt.
- **Combi Sound Reducer** provides a reduction of the step sound in a floor separation of 4 dB (more than half the energy) and more than meets the requirements for step sound insulation. Airborne sound of footsteps on the floor is also noticeably muffled.
- **Combi Sound Reducer Light** provides a reduction of the step sound in a floor separation of 1 dB and is used when the building legislation's minimum requirement of less than 53 dB must be complied with.

The Combi Max system is easy and quick to work with: You simply click the elements together and fine-tune the height.



Combi Max wedges		Min.	Max.	Pcs. / Carton / Pallet			Item no.
	Combi Max Top	Incl. in height Combi Max Low/Max High		150	40	1	986408220
	Combi Max Low	50 mm*	110 mm*	75	40	1	987808220
	Combi Max High	77 mm*	138 mm*	75	20	1	985104221
	Combi Extension	+ 35 mm / stk.		150	20	1	975108120
	Combi Sound Reducer	+ 10 mm**		150	40	1	8701210K
	Combi Sound Reducer Light	+ 10 mm**		150	32	1	8701209K
	Combi Sole	+ 2 mm		150	32	1	989502120

* Height incl. Combi Max Top / ** Can compress 0-2 mm depending on pressure load.

Extensive documentation with independent test reports for pressure load, step sound and ageing is a safeguard against expensive claims – now and in the future. Documentation can be found at www.knudsenkilen.dk



Knudsen Kilen

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksværk • tlf.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on