


Knudsen Kilen

Data Sheet Combi Max Top

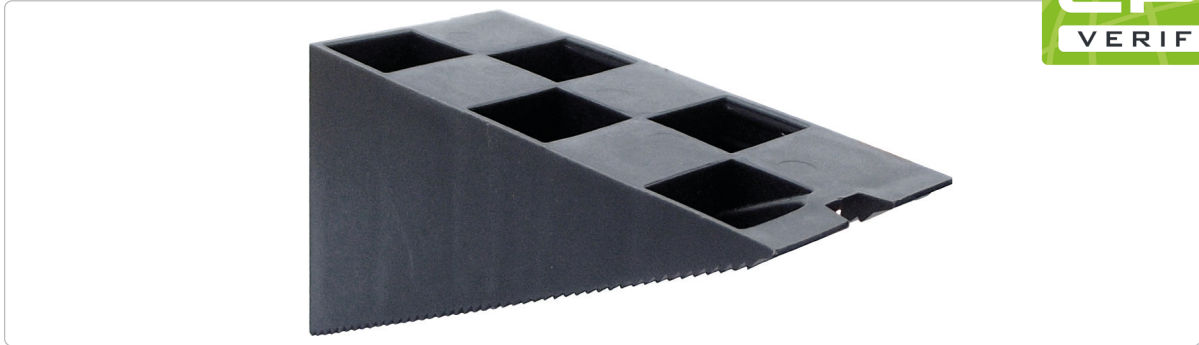

The Combi Max series used for blocking up wooden floor on joists. It is also very suitable for modular building of terraces with Combi Sole which stabilises the modular structure on uneven foundations and protects vulnerable surfaces such as roofing felt.

The blocking up height ranges from 50-138 mm and further up to 313 mm when using Combi Extension.

Combi Max Top is used together with Combi Max Low or Combi Max High.

In addition, Combi Extension, Combi Sole, Combi Sound Reducer and Combi Sound Reducer Light can be used with the products in the Combi Max series.

Technical information

Properties	Specifications	Remarks
Item number	986408220	
Material	LDPE (Low Density Polyethylene)	
Width / Length	42 / 100 mm	
Height	1 - 54 mm	
Color	Anthracite grey	
Weight	34 grams	
Temperature High (Softing Point)	95 °C	
Temperature Low (Low Temperature Brittleness)	-73 °C	
UV resistance	UV additive added in masterbatch	
Aging effect	At 75 years, no change is seen in the material	The wedge has been tested at 20 degrees according to work standard SPF2000
Consumption per m2	6 pieces	When leveling joist floors
Moisture	Is not affected by moisture, rot og fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



 **Knudsen Kilen**

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksværk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on 