




Knudsen Kilen

Data Sheet Combi Top Large

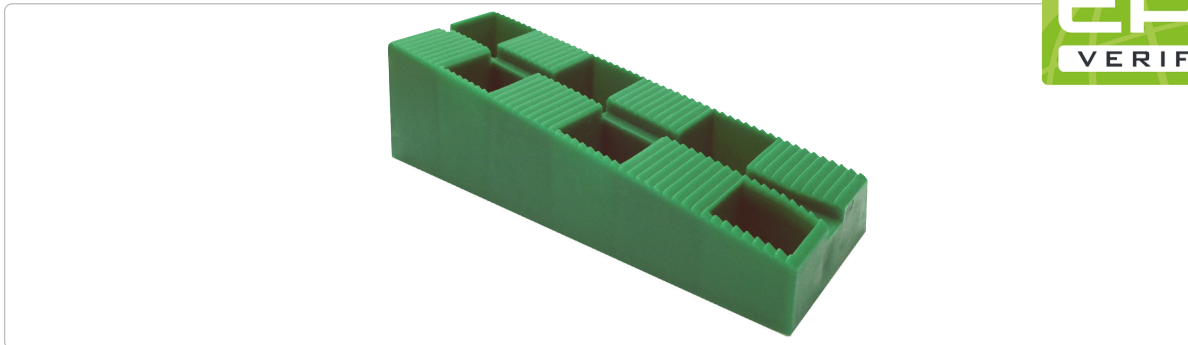

Combi series for blocking up wooden floor on joists.

Combi Top Large is used together with Combi Base, but can alternatively be used with another Combi Top Large, Combi Top Small or Combi Top Medium as a base wedge and also with the Combi Top Sound Wedges for better step sound reduction.

Blocking up heights when used with Combi Base is 48-75 mm and further up to 250 mm With Combi Extension.

Blocking up heights together with:

Combi Top Small: 31-63 mm / Combi Top Medium: 43-64 mm / Combi Top Large: 45-79 mm.

Technical information

Properties	Specifications	Remarks
Item number	975508120	
Material	LDPE (Low Density Polyethylene)	
Width / Length	43 / 153 mm	
Height	19 - 43 mm	
Color	Dark green	
Weight	48 grams	
Temperature High (Softing Point)	95 °C	
Temperature Low (Low Temperature Brittleness)	-73 °C	
UV resistance	UV additive added in masterbatch	
Aging effect	At 75 years, no change is seen in the material	The wedge has been tested at 20 degrees according to work standard SPF2000
Point load	250 kg	At flat pressure 40x40 mm
Surface load	1.500 kg	Per m2 floor when using 6 sets of wedges per m2
Weighted step sound reduction	16 dB	With Combi Top Medium
Consumption per m2	6 pieces	When leveling joist floors
Moisture	Is not affected by moisture, rot og fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



Knudsen Kilen

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksvaerk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on **LinkedIn**