


Knudsen Kilen

Data Sheet Combi Top Medium

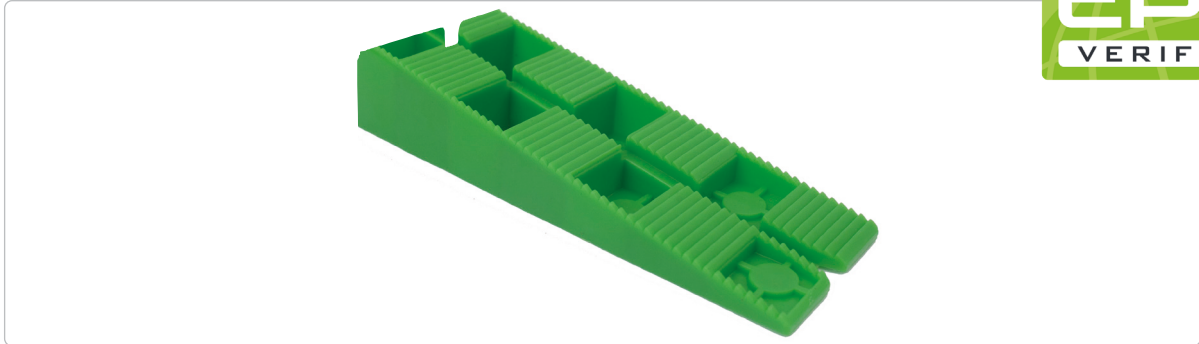

Combi series for blocking up wooden floor on joists.

Combi Top Medium is used together with Combi Base, but can alternatively be used with another Combi Top Medium, Combi Top Small or Combi Top Large as a base wedge and also with the Combi Top Sound Wedges for better step sound reduction.

Blocking up heights when used with Combi Base is 32-58 mm and further up to 233 mm With Combi Extension.

Blocking up heights together with:

Combi Top Medium: 28-49 mm / Combi Top Small: 19-40 mm / Combi Top Large: 43-64 mm.

Technical information

Properties	Specifications	Remarks
Item number	975408120	
Material	LDPE (Low Density Polyethylene)	
Width / Length	43 / 130 mm	
Height	3 - 28 mm	
Color	Green	
Weight	27 grams	
Temperature High (Softing Point)	95 °C	
Temperature Low (Low Temperature Brittleness)	-73 °C	
UV resistance	UV additive added in masterbatch	
Aging effect	At 75 years, no change is seen in the material	The wedge has been tested at 20 degrees according to work standard SPF2000
Point load	250 kg	At flat pressure 40x40 mm
Surface load	1.500 kg	Per m2 floor when using 6 sets of wedges per m2
Weighted step sound reduction	16 dB	With Combi Top Medium
Consumption per m2	6 pieces	When leveling joist floors
Moisture	Is not affected by moisture, rot og fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



 **Knudsen Kilen**

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksvaerk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on 