




Knudsen Kilen

Data Sheet Green Wedge

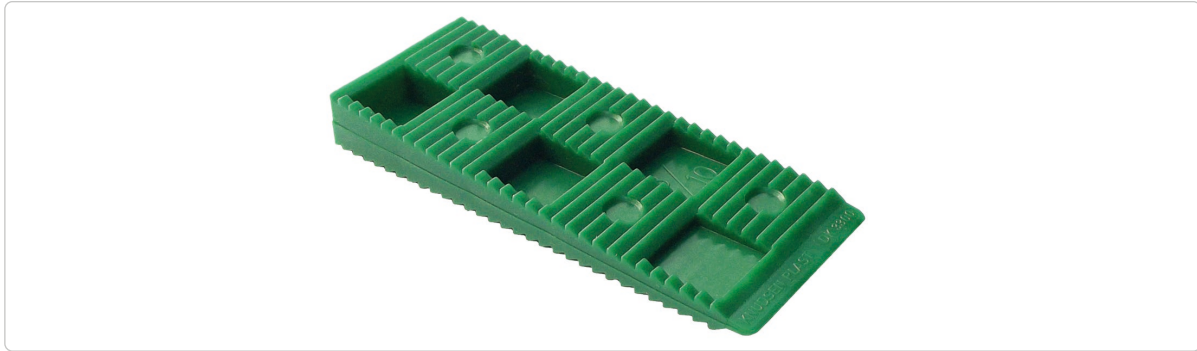

The Green Wedge is used for leveling of lighter components and as temporary spacing. It can not be used for permanent leveling. The Green Wedge is the smallest standard wedge in the range and do to the unique tooth pattern it can only be used with another Green Wedge.

Technical information

Properties	Specifications	Remarks
Item number	910200080	
Material	LDPE (Low Density Polyethylen)	
Width / Length	30 / 80 mm	
Height	2 - 10 mm	
Color	Green	
Weight	7 grams	
Temperature High (Softing Point)	95 °C	
Temperature Low (Low Temperature Brittleness)	-73 °C	
UV resistance	Added UV additive in masterbatch	
Aging effect	At 75 years, no change is seen in the material	The wedge has been tested at 20 degrees according to work standard SPF2000
Point load	80 - 220 kg	With an overlap of 35-100%
Moisture	Is not affected by moisture, rot or fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



Knudsen Kilen

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksvaerk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on **LinkedIn**