


# Knudsen Kilen

## Data Sheet Hanger Shim 4 mm

ECO PLATFORM

**EPD**  
VERIFIED

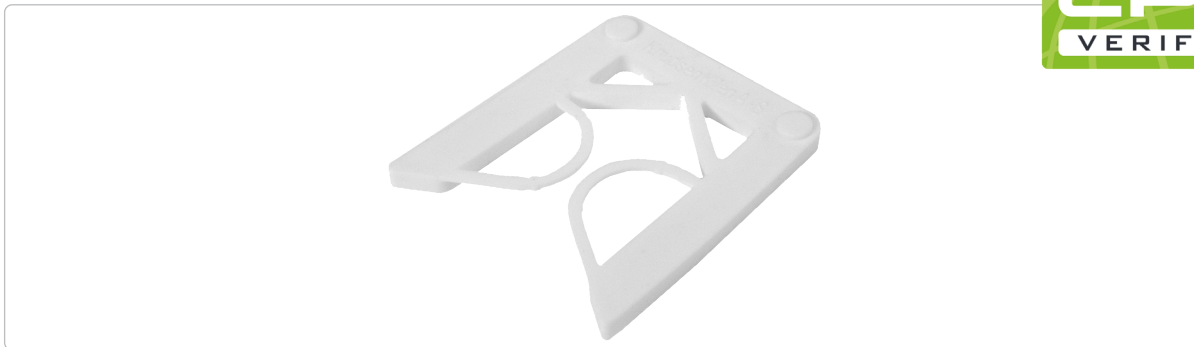

Hanger Shims have been developed for inserting windows and doors since they can balance on a screw, thus not falling on the floor before the subject is finally tightened.

Furthermore, Hanger Shims are used for distance adjustment and leveling of light tasks in connection with most assembly tasks, such as fitting kitchens, alignment of walls, leveling ceilings, etc.

Hanger Shims cannot be used for heavy leveling tasks such as floors, rafters etc.

## Technical information

Properties	Specifications	Remarks
Item number	973204010	
Material	LDPE (Low Density Polyethylene)	
Width / Length	46 / 54 mm	
Height	4 mm	
Color	White	
Weight	4 grams	
Temperature High (Softing Point)	95 °C	
Temperature Low (Low Temperature Brittleness)	-73 °C	
UV resistance	UV additive added in masterbatch	
Aging effect	At 75 years, no change is seen in the material	The wedge has been tested at 20 degrees according to work standard SPF2000
Surface load	200 kg	
Moisture	Is not affected by moisture, rot og fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



 **Knudsen Kilen**

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksvaerk • tel.: +45 47 76 01 01  
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on 