


Knudsen Kilen

Data Sheet Hanger Shim 5 mm

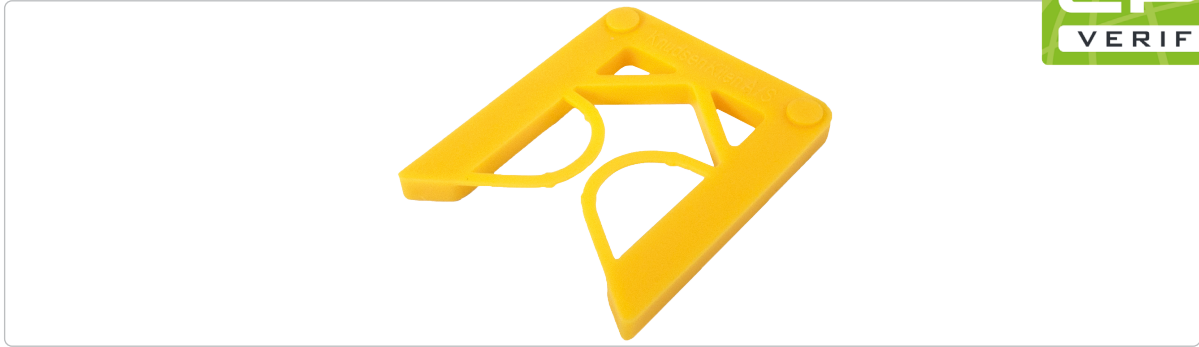

Hanger Shims have been developed for inserting windows and doors since they can balance on a screw, thus not falling on the floor before the subject is finally tightened.

Furthermore, Hanger Shims are used for distance adjustment and leveling of light tasks in connection with most assembly tasks, such as fitting kitchens, alignment of walls, leveling ceilings, etc.

Hanger Shims cannot be used for heavy leveling tasks such as floors, rafters etc.

Technical information

| Properties | Specifications | Remarks |
|---|--|--|
| Item number | 973204060 | |
| Material | LDPE (Low Density Polyethylene) | |
| Width / Length | 46 / 54 mm | |
| Height | 5 mm | |
| Color | Yellow | |
| Weight | 5 grams | |
| Temperature High (Softing Point) | 95 °C | |
| Temperature Low (Low Temperature Brittleness) | -73 °C | |
| UV resistance | UV additive added in masterbatch | |
| Aging effect | At 75 years, no change is seen in the material | The wedge has been tested at 20 degrees according to work standard SPF2000 |
| Surface load | 200 kg | |
| Moisture | Is not affected by moisture, rot og fungus | |
| Fire | Does not emit toxic fumes in case of fire | |
| Fire classification | Fuel class B2 / DIN 4102-1 | |
| Capillary breaking | Yes | |



 **Knudsen Kilen**

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksvaerk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on 