




Knudsen Kilen

Data Sheet K-Block 6T 10 mm

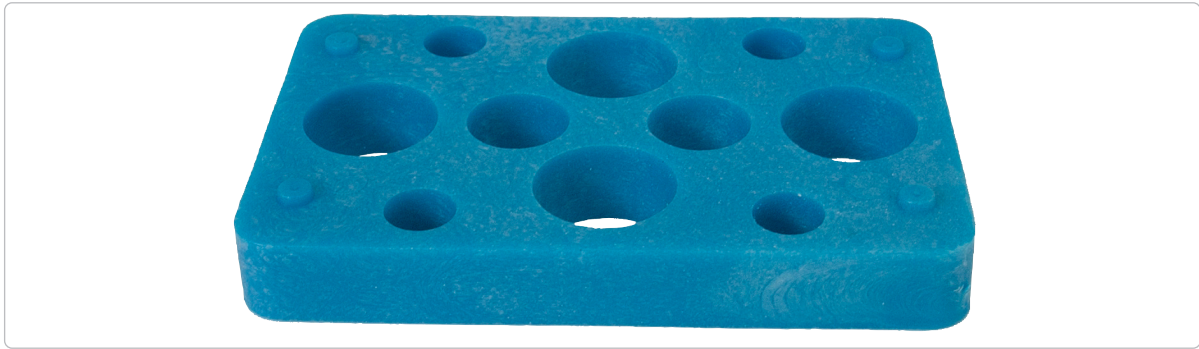

The K-Block 6T series has a carrying capacity of 6,000 kg and is therefore suitable for blocking up very heavy subjects such as window sections, steel joists, and concrete panels.

All sizes (2, 3, 5, 10 and 20 mm) can merge together to form a singular block with the desired height.

K-Block 6T cannot be used together with K-Block 45.

Technical information

Properties	Specifications	Remarks
Item number	985004052	
Material	HDPE (High Density Polyethylene)	
Width / Length	50 / 80 mm	
Thickness	10 mm	
Color	Blue	
Weight	22 grams	
Temperature High (Softing Point)	120 °C	
Temperature Low (Low Temperature Brittleness)	-76 °C	
Pressure load	6,000 kg	According to test done by Danish Technological Institute
Moisture	Is not affected by moisture, rot og fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



Knudsen Kilen

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksværk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on **LinkedIn**