


Knudsen Kilen

Data Sheet K-Block 6T 2 mm

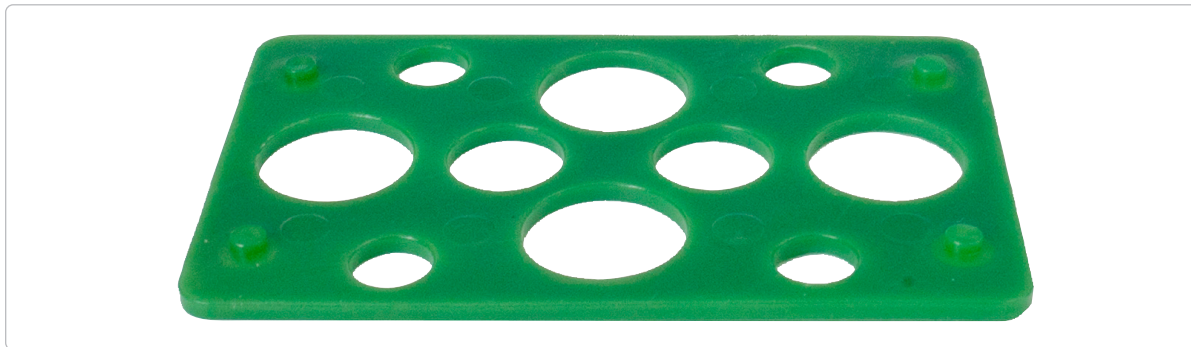

The K-Block 6T series has a carrying capacity of 6,000 kg and is therefore suitable for blocking up very heavy subjects such as window sections, steel joists, and concrete panels.

All sizes (2, 3, 5, 10 and 20 mm) can merge together to form a singular block with the desired height.

K-Block 6T cannot be used together with K-Block 45.

Technical information

| Properties | Specifications | Remarks |
|---|--|--|
| Item number | 985004050 | |
| Material | HDPE (High Density Polyethylene) | |
| Width / Length | 50 / 80 mm | |
| Thickness | 2 mm | |
| Color | Green | |
| Weight | 5 grams | |
| Temperature High (Softing Point) | 120 °C | |
| Temperature Low (Low Temperature Brittleness) | -76 °C | |
| Pressure load | 6,000 kg | According to test done by Danish Technological Institute |
| Moisture | Is not affected by moisture, rot og fungus | |
| Fire | Does not emit toxic fumes in case of fire | |
| Fire classification | Fuel class B2 / DIN 4102-1 | |
| Capillary breaking | Yes | |

