




Knudsen Kilen

Data Sheet Orange Wedge

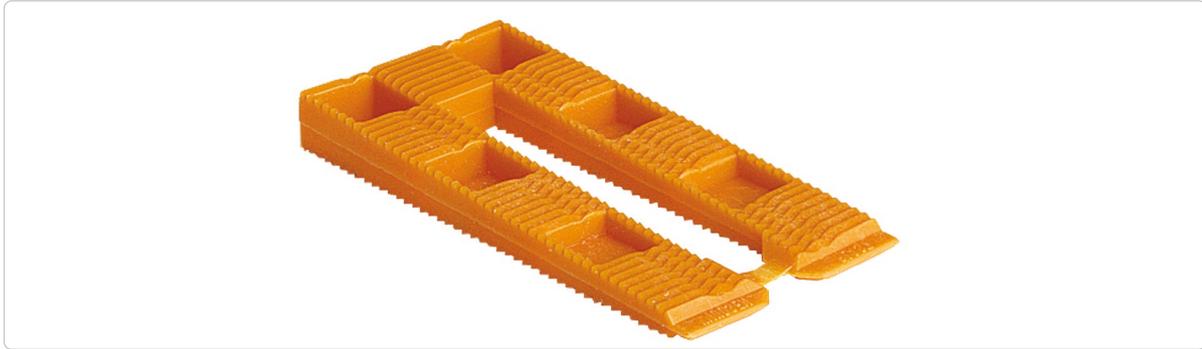

The Orange Wedge is often used for leveling of components on vertical surfaces, since it can be slid in between the wall and the item with a "leg" on each side of the screw, hence preventing it from falling down. The orange Wedge is also used for leveling of lighter components, temporary spacing etc. Due to the unique tooth pattern it can only be used with another Orange Wedge.

Technical information

Properties	Specifications	Remarks
Item number	928700110	
Material	LDPE (Low Density Polyethylen)	
Width / Length	40 / 80 mm	
Height	1 - 8 mm	
Color	Orange	
Weight	7 grams	
Temperature High (Softing Point)	95 °C	
Temperature Low (Low Temperature Brittleness)	-73 °C	
UV resistance	Added UV additive in masterbatch	
Aging effect	At 75 years, no change is seen in the material	The wedge has been tested at 20 degrees according to work standard SPF2000
Point load	80 - 220 kg	With an overlap of 35-100%
Moisture	Is not affected by moisture, rot or fungus	
Fire	Does not emit toxic fumes in case of fire	
Fire classification	Fuel class B2 / DIN 4102-1	
Capillary breaking	Yes	



Knudsen Kilen

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksvaerk • tel.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on **LinkedIn**