




Knudsen Kilen

K-Wall mounting brackets

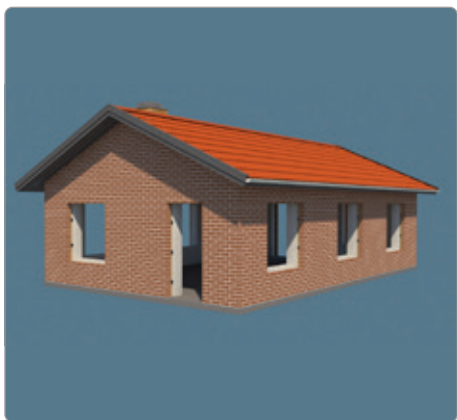

K-Wall

- mounting and fitting of door and window frames

- No cold conductor / no line loss
- Carrying capacity 120 kg per bracket
- Tests carried out at Danish Technological Institute
- Optional positioning in front or back wall
- Pre-drilled in frame and brackets
- Min. 2 K-Wall brackets per false
- Max. 20 cm to corner of subject
- Max. 60 cm between each bracket

K-Wall is made from ABS plastic og offers a reliable and energy-efficient solution that meets the stricter requirements and ensures efficient installation of doors and windows.


K-Wall for building-in (i)

Optional positioning in front or back wall.

Can also be embedded in the concrete element directly at the factory.

Mounting in the back wall allows for quick closing of the climate screen with the remaining doors and windows.


This reduces the risk of moisture damage, theft and vandalism.

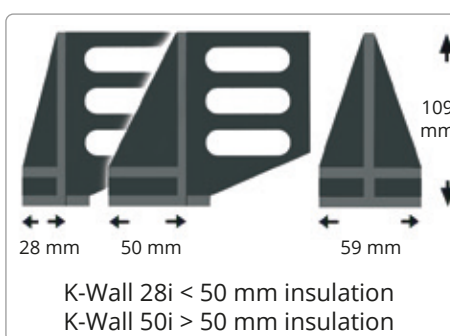





K-Wall for retrofitting (e)

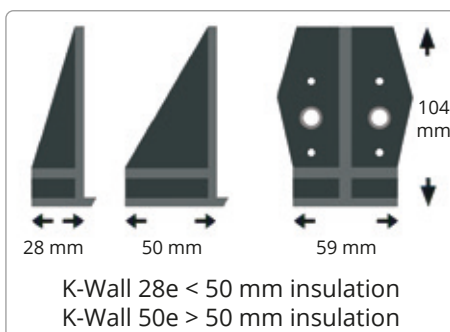Suitable for renovations where doors and windows must be moved in connection with external insulation.

Can be retrofitted to the front or back wall with suitable screws or bolts.



		Pcs / Carton / Pallet			Item no.
K-Wall 28i		50	48	1	8701110K
K-Wall 50i		50	30	1	986902120
K-Wall 28e		50	72	1	9094302130
K-Wall 50e		50	48	1	9094402130



Knudsen Kilen

Knudsen Kilen A/S • Industrivej 21 • DK - 3300 Frederiksværk • tlf.: +45 47 76 01 01
info@knudsenkilen.dk • www.knudsenkilen.dk

Follow us on [LinkedIn](#)